

AKG.STUDIO.PRECISION

PRECISE ARTISTIC WORK
DESERVES PRECISE ARTISTIC
CRAFTSMANSHIP.

C 451 B -
It was Worth
Waiting for.



AKG.STUDIO.PRECISION

- Identical acoustics of the legendary CK 1.
- Rugged construction.
- Ruler-flat on-axis frequency response.
- Precise, nearly frequency independent cardioid.
- Extremely accurate signal transfer.
- Transformerless output stage for minimum distortion at low frequencies.
- Protected against electrostatic and magnetic interference.
- Selectable 10-dB and 20-dB preattenuation pads.
- Switchable highpass filter (75 Hz or 150 Hz, 12 dB/octave).
- Operates on phantom power to DIN/IEC between 12 V and 48 V.
- Complete with SA 40 stand adapter and W 90 windscreen.
- Each microphone comes with its own individual frequency response plot.

C 451 B - It was V

A classic by now, the CMS Series CK 1 capsule from AKG was a best seller from the moment it was launched in 1969. Comprising a range of interchangeable capsules and preamps as well as then innovative, dedicated accessories, the CMS Series from AKG quickly became a legend. It was discontinued in 1993.

Responding to growing demand from recording engineers, AKG decided to produce the **C 451 B with identical acoustical behaviour of the popular original C 451 EB + CK 1 microphone** again, with dramatically **improved specifications and outstanding price/performance**.

The capsule of the new version is **fixed permanently to the preamp** to eliminate the mechanical problems of the screw joint. Using an extremely **light diaphragm**, the new **C 451 B is almost totally insensitive to handling noise**. An all-metal body provides **excellent protection from RF interference** and the microphone is rugged enough to give excellent results even under very harsh conditions.

The C 451 B is an excellent tool **for accurately capturing signals rich in transients such as drums, overhead miking, or other instruments with a percussive sound**. The airy sound, **high overload limit** of the capsule and electronic circuitry, and improved engineering details of the C 451 B are a solid foundation for creating another legend.

The capsule is permanently fixed to the preamp to increase overall stability under mechanical stress.

A switchable 10-dB/20-dB preattenuation pad increases the microphone's SPL capability when close-miking high-energy sound sources or driving preamps or mixers with limited headroom.


A switchable highpass filter at 75 Hz or 150 Hz prevents low-end distortion due, e.g., to rumble or wind noise.

AKG.STUDIO.PRECISION

Worth Waiting for.




Overhead miking

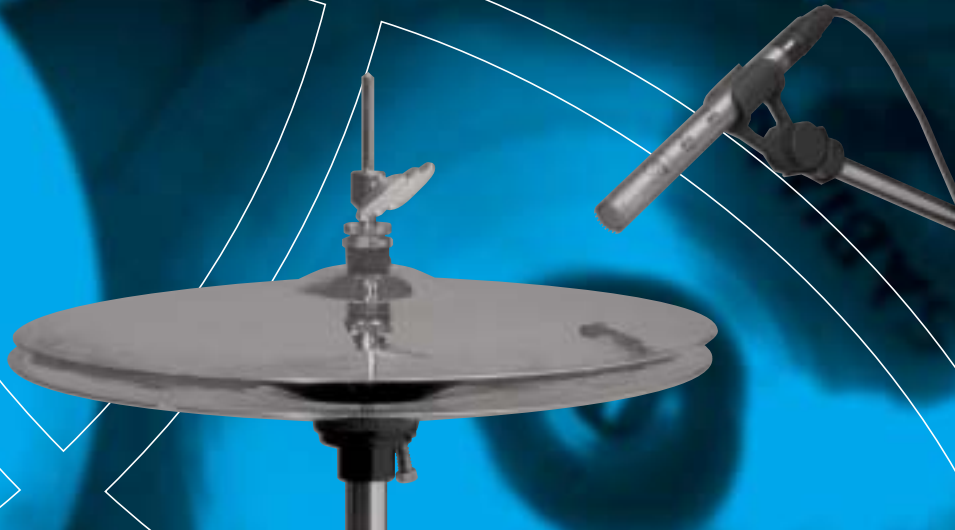


Hi-hat

More Applications:

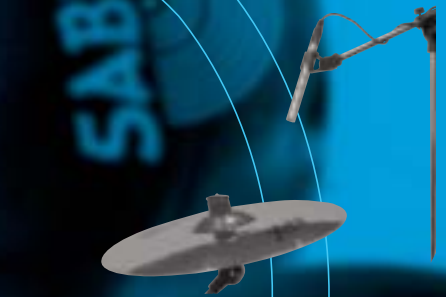

Cymbals



Snare drum



Percussions



Acoustic guitar

AKG.STUDIO.PRECISION

Specifications:

Polar pattern:	cardioid
Frequency range:	20 to 20,000 Hz ± 1.5 dB from published curve
Sensitivity:	9 mV/Pa $\triangle$ -41 dBV re 1 V/Pa
Electrical impedance:	< 200 ohms
Recommended load impedance:	> 1000 ohms
Max. SPL for 0.5% THD:	112 Pa $\triangle$ 135 dB SPL with 0 dB preattenuation*) 355 Pa $\triangle$ 145 dB SPL with 10 dB preattenuation*) 1120 Pa $\triangle$ 155 dB SPL with 20 dB preattenuation*)
Equivalent noise level to DIN 45 412 (A-weighted):	18 dB-A
Dynamic range:	117 dB max. (A-weighted*)
Preattenuation pad:	switchable to 0 dB, -10 dB, -20 dB
Highpass filter:	switchable to flat, 12 dB/octave at 75 Hz or 150 Hz
Powering:	9 to 52 V phantom power to DIN/IEC 45 596
Current consumption:	< 2 mA
Operating temperature:	-20°C to +60°C
Relative humidity:	99% (+20°C); 95% (+60°C)
Connector:	3-pin male XLR
Finish:	satin nickel plated
Size:	dia.: 19 mm (0.75 in.); length: 160 mm (6.3 in.)
Net/shipping weight:	125 g (4.4 oz.) / 760 g (1.7 lbs.)



This product conforms to EN 50 082-1 (1997) provided it is connected to CE marked equipment.

*) Values measured with 48-V phantom power. Reduce by 2 dB for 24-V or 8 dB for 12-V phantom power.

Standard Set:



Cardioid

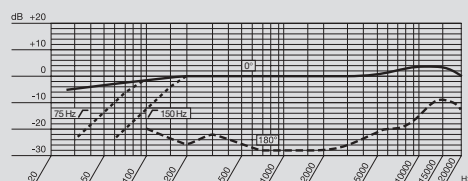

Optional Accessories:

	B 18	battery power supply	SA 38/H	shock mount/stand adapter
	MK 9/10	10-m (33-ft.) connecting cable	ST 45	small table stand
	N 62 E	two-channel AC power supply	ST 305	heavy table stand
	N 66 E	six-channel AC power supply	ST 12	short floor stand
	PF 80	pop filter	ST 102 A	boom stand
	SA 18/1B	all-metal stand adapter	ST 200	heavy-duty floor stand

Microphones · Headphones · Wireless Microphones · Wireless Headphones · Headsets · Electroacoustical Components

AKG Acoustics GmbH

Lemböckgasse 21-25, P.O.B. 158, A-1230 Vienna/AUSTRIA, Tel: (+43 1) 86 654-0*, Fax: (+43 1) 86 654-7516, www.akg.com, e-mail: sales@akg.com

* A Harman International Company

AKG Acoustics GmbH

Bodenseestraße 228, D-81243 München/GERMANY, Tel: (+49 89) 87 16-0, Fax: (+49 89) 87 16-200, www.akg-acoustics.de, e-mail: info@akg-acoustics.de

AKG ACoustics, U.S.

914 Airpark Center Drive, Nashville, TN 37217, U.S.A., Tel: (+1 615) 620-3800, Fax: (+1 615) 620-3875, www.akgusa.com, e-mail: akgsusa@harman.com

For other products and distributors worldwide see our website: www.akg.com

Specifications subject to change without notice.

Printed in Austria.

04/02/PROA 1390

www.akg.com

